


GROOVED OUTLETS FOR PREFABRICATED SPRINKLER PIPES READY FOR WELDING

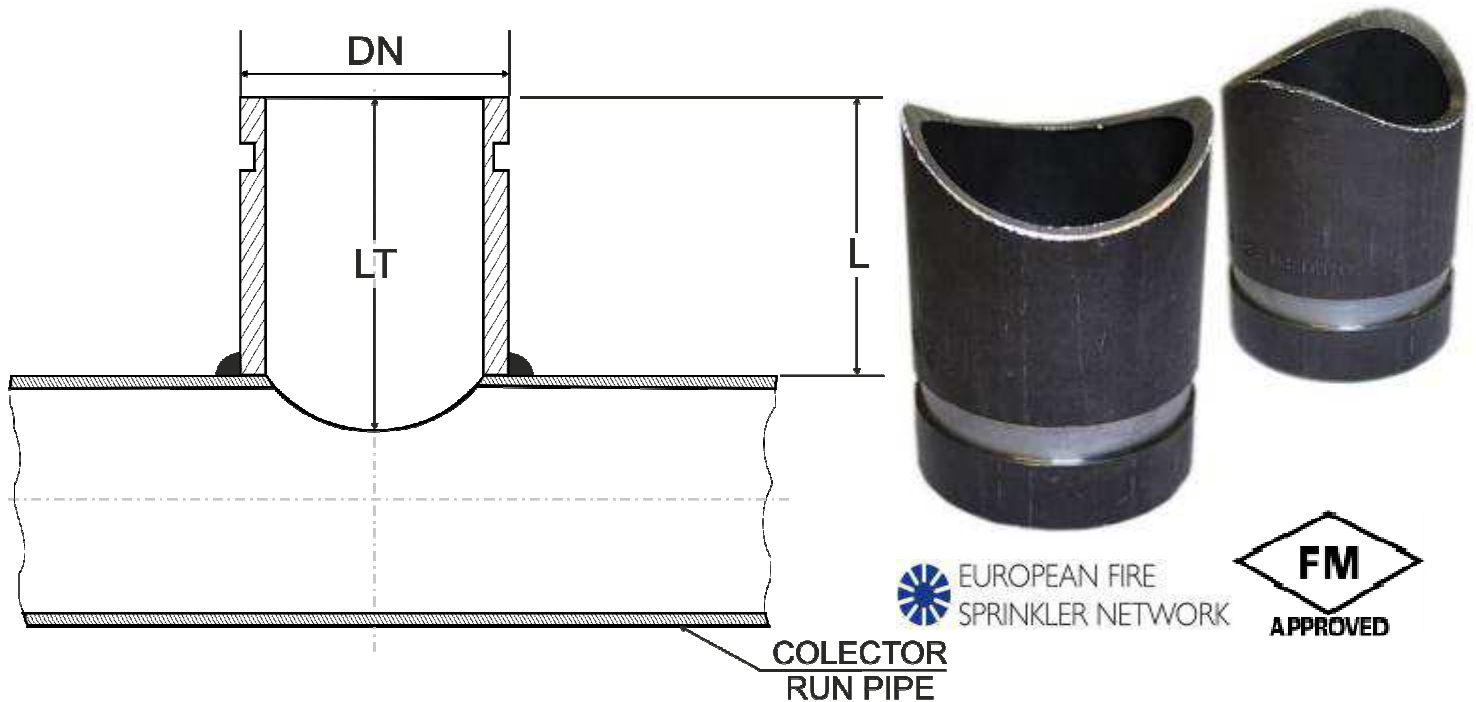

(DN)	Ø Colector Ø Run Pipe	Weight approx. Kg.	LT ± 1 mm	L ± 1 mm							
				Ø COLECTOR Ø Run Pipe							
				1 1/2"	2"	2 1/2"	3"	4"	5"	6"	8"
1" (DN-25)	ON DEMAND, WE CUT FITTINGS TO ADAPT EXACTLY TO THE REQUIRED COLLECTOR	0,177	82	75,15	76,85	78,07	78,68	79,46	79,94	80,36	80,70
1 1/4" (DN-32)		0,246	82		73,29	75,55	76,62	77,92	78,71	79,39	79,93
1 1/2" (DN-40)		0,303	82		69,90	73,35	74,87	76,65	77,69	78,60	79,30
2" (DN-50)		0,396	82			67,16	70,21	73,40	75,16	76,64	77,77
2 1/2" (DN-65)		0,600	82				60,53	67,49	70,73	73,3	75,18

- Materiel: Acier Carbon St.-37.0 ou equivalent / Carbon Steel St.-37.0 or equivalent
- Pression de travail máximale: 21 Kg./cm² / Maximum working pressure: 21 Kg./cm²