


NIPPLES FOR PREFABRICATED SPRINKLER PIPES THREADED READY FOR WELDING

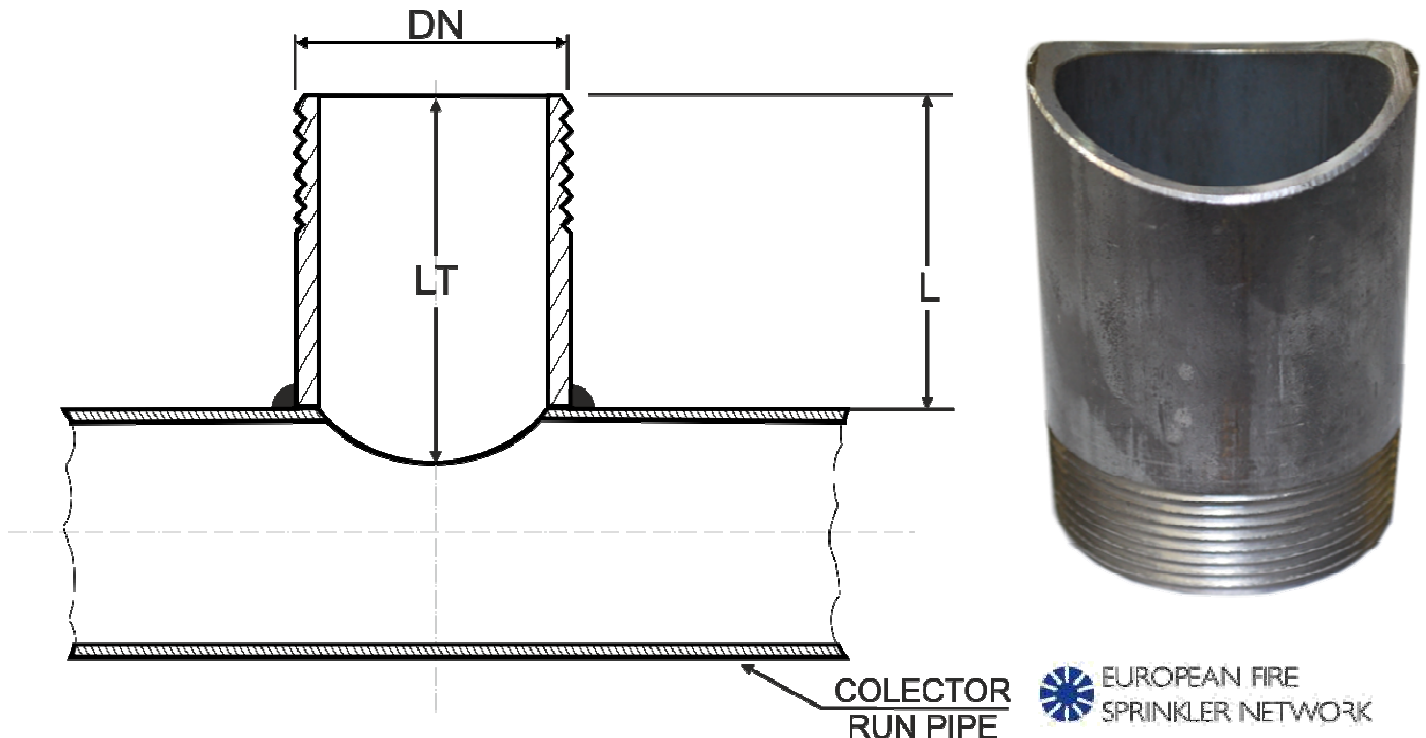

(DN)	LT ± 1 mm	PESO Ud. Aprox. Kg.	Ø Colector Ø Run Pipe	EJEMPLOS L ± 1 mm					
				Ø Colector Ø Run Pipe					
				1"	1 1/4"	1 1/2"	2"	2 1/2"	3"
1" (DN 25)	55	0,203	FOLLOWING CUSTOMER DEMAND, WE CUT FITTINGS TO ADAPT EXACTLY TO THE REQUIRED COLLECTOR		41,51	44,75	47,63	49,55	50,37
1 1/4" (DN 32)	55	0,165				44,18	46,29	48,55	49,62
1 1/2" (DN 40)	55	0,118					42,90	46,35	47,35

- Materiel: Acier Carbon St.-37.0 ou equivalent / Carbon Steel St.-37.0 or equivalent
- Vissage: BSP (UNE-EN ISO 228-1) / Thread: BSP (UNE-EN ISO 228-1)
- Pression de travail maximale: 21 Kg./cm² / Maximum working pressure: 21 Kg./cm²