


OUTLETS FOR PREFABRICATED SPRINKLER PIPES THREADED READY FOR WELDING

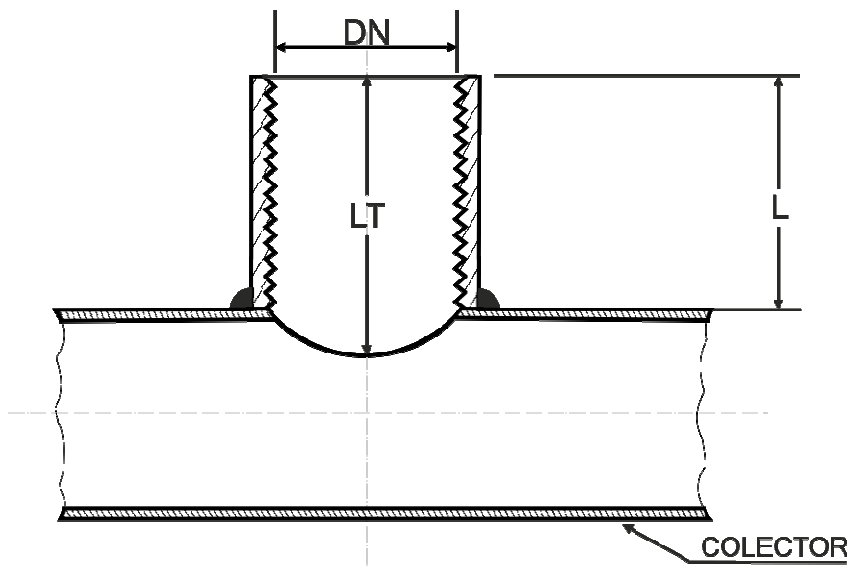

(DN)	Ø Ext.	LT ± 1 mm	Weight approx . Kg.	Ø Colector Ø Run Pipe	L ± 1 mm					
					Ø Colector Ø Run Pipe					
					1"	1 1/4"	1 1/2"	2"	2 1/2"	3"
1/2" (DN 15)	26,6	34	0,05	ON DEMAND, WE CUT FITTINGS TO ADAPT EXACTLY TO THE REQUIRED COLLECTOR	27,62	29,39	30,07	30,96	31,6	31,96
3/4" (DN 20)	31,8	36	0,075			29,82	31,03	32,47	32,52	33,06
1" (DN 25)	39,5	43	0,130			29,51	32,75	35,63	37,55	38,37

- Materiel: Acier Carbon St.-37.0 ou equivalent / Carbon Steel St.-37.0 or equivalent
- Vissage: BSP (UNE-EN ISO 228-1) / Thread: BSP (UNE-EN ISO 228-1)
- Pression de travail máximale: 21 Kg./cm² / Maximum working pressure: 21 Kg./cm²